

2	STUD	M2X1.85mm
1	TOP COVER	SECC t=0.6mm,Silver painting
P/N	PART NAME	Description



TOL ±	M1	M2	S1	S2	P1	P2	C	USR	MODEL	DESCRIPTION
0~6	.05	0.1	0.15	0.2	.05	0.1	0.5		DATE	2014/12/01
6~30	0.1	0.2	0.15	0.25	0.1	0.15	1		DRN	MAX
30~80	.15	0.25	0.2	0.3	0.2	0.4	2		CKD	
80~180	.15	0.3	0.25	0.45	0.4	0.8	3		APPD	I
180~315	0.2	0.5	0.4	0.6	0.6	1.2	3			
315~800	0.3	0.8	0.7	1.1	0.8	1.5	4			
ANG. TOL ±	0°~30°	0.2°	30°~60°	0.5°	60°~90°	1°				

DESCRIPTION	2.5" SSD SATA TOP ASS'Y_Silver painting_5.0mm	
DATE	2014/12/01	DWG NO.
DRN	MAX	P/N NO.
CKD		CASE-TB12-1
APPD	I	


<b>EVERTRON</b>		DIM	MM
		SIZE	A4





1	BOT COVER	SECC t=0.6mm,Silver painting
P/N	PART NAME	Description

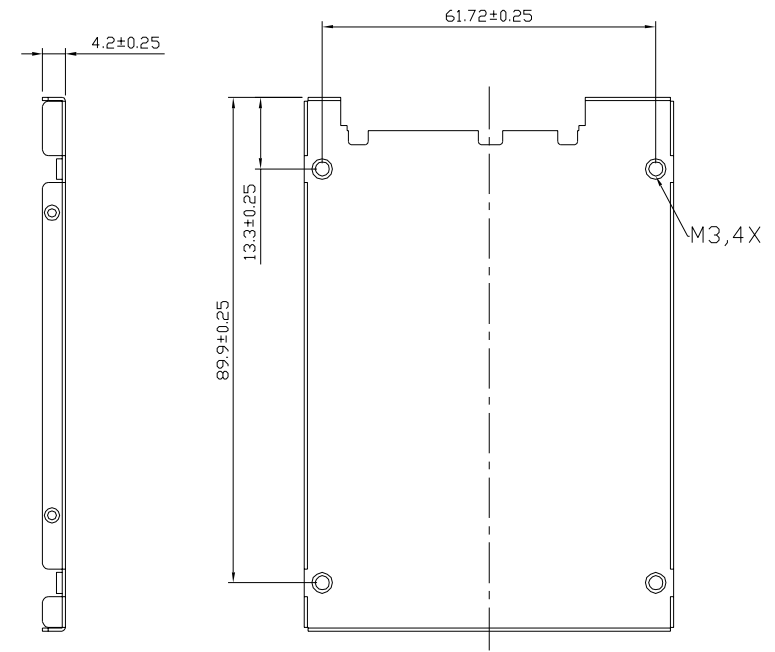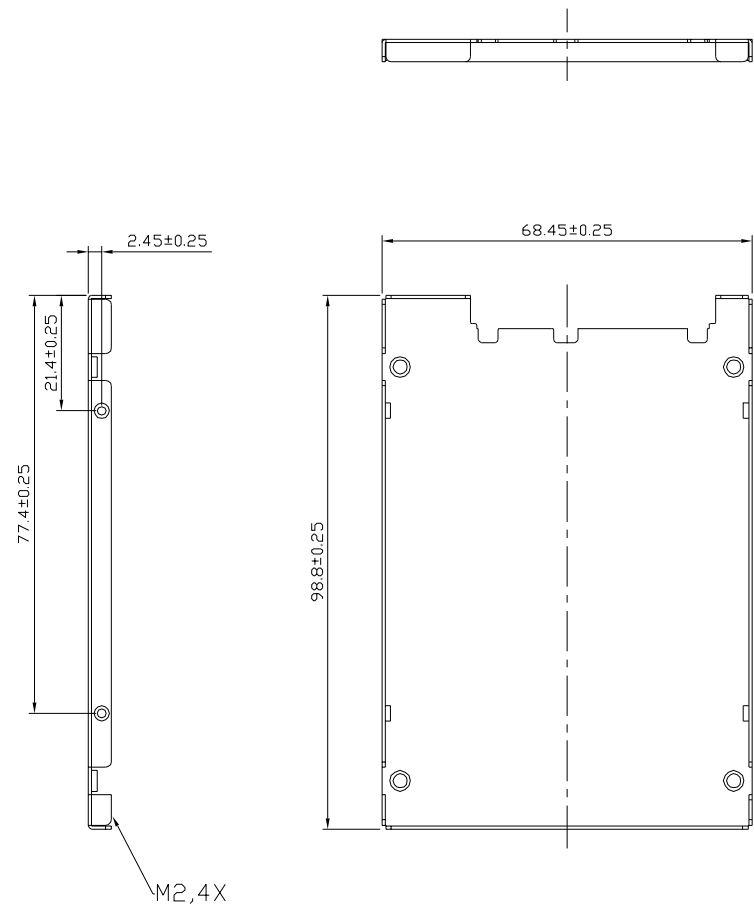TOL ±	M1	M2	S1	S2	P1	P2	C	USR	MODEL	DESCRIPTION
0~6	.05	0.1	0.15	0.2	.05	0.1	0.5			2.5" SSD SATA BOT ASS'Y_Silver painting_5.0mm
6~30	0.1	0.2	0.15	0.25	0.1	0.15	1		DATE	2014/12/01
30~80	.15	0.25	0.2	0.3	0.2	0.4	2		DWG NO.	
80~180	.15	0.3	0.25	0.45	0.4	0.8	3		DRN	MAX
180~315	0.2	0.5	0.4	0.6	0.6	1.2	3		P/N NO.	CASE-BB12-1
315~800	0.3	0.8	0.7	1.1	0.8	1.5	4		CKD	
ANG. TOL ±	0°~30°	0.2°	30°~60°	0.5°	60°~90°	1°			APPD	I

**EVERTRON**



REV	1.0	DIM	MM
SCALE	1/1	SIZE	A4

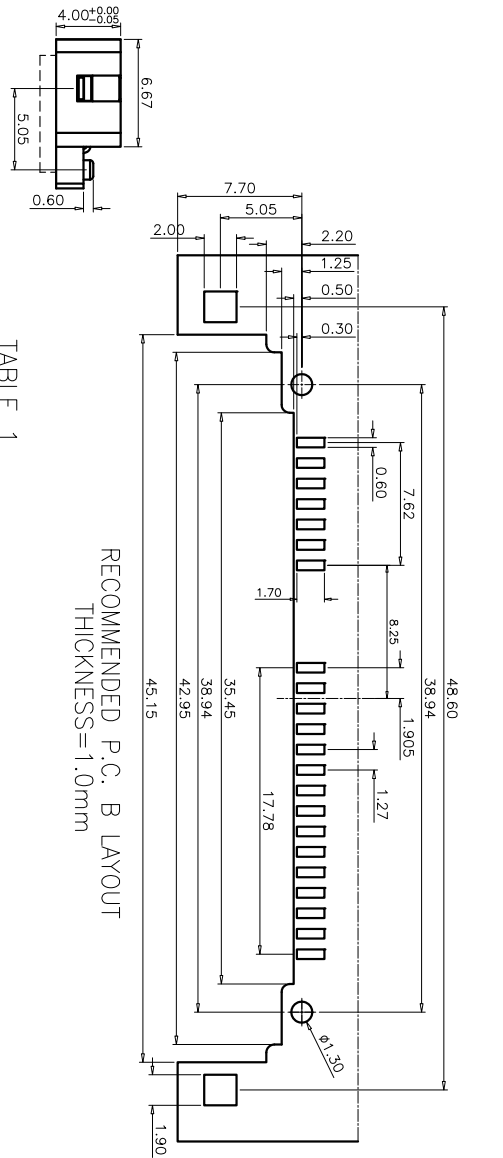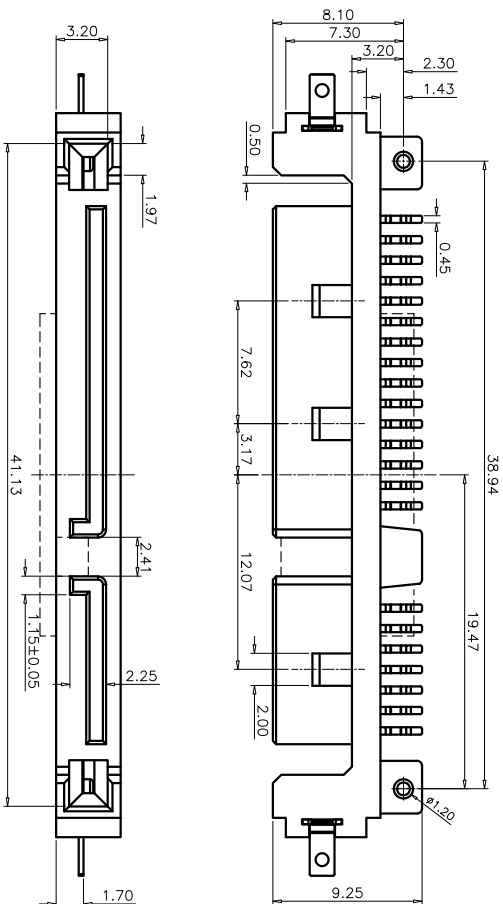



RECOMMENDED P.C. B LAYOUT  
THICKNESS=1.0mm

TABLE 1



ET-SATA-22L-763	GOLD FLASH	LCP BLACK	
ET-SATA-22L-764	15 U" GOLD	LCP BLACK	
ET-SATA-22L-765	30 U" GOLD	LCP BLACK	
PART NO.	PLATED	PLASTIC&COLOR	NOTE

NOTE:

- 1.MATERIAL:  
HOUSING:HIGH TEMPERATURE THERMOPLASTIC,U194V-0  
COVER:HIGH TEMPERATURE THERMOPLASTIC,U194V-0  
TERMINAL:COPPER ALLOY,THICKNESS = 0.25 mm  
FORLOCK:COPPER ALLOY,THICKNESS = 0.30 mm
- 2.PLATING:  
CONTACT:GOLD OVER 50u" MIN NICKEL UNDERPLATE  
SOLDER TAIL:75u"MIN TIN 50u" MIN NICKEL UNDERPLATE  
GOLD SPECIFICATION:SEE TABLE,
- 3.ELECTRONICAL SPECIFICATION:  
CURRENT RATING:1.5 AMPERE PER CONTACT  
CONTACT RESISTANCE:30 MILLIOHMS MAX.  
INSULATION RESISTANCE:1000 MEGOHMS MIN.  
DIELECTRIC WITHSTANDING VOLTAGE:500 VDC.  
OPERATING TEMPERATURE:-20C~+85C°

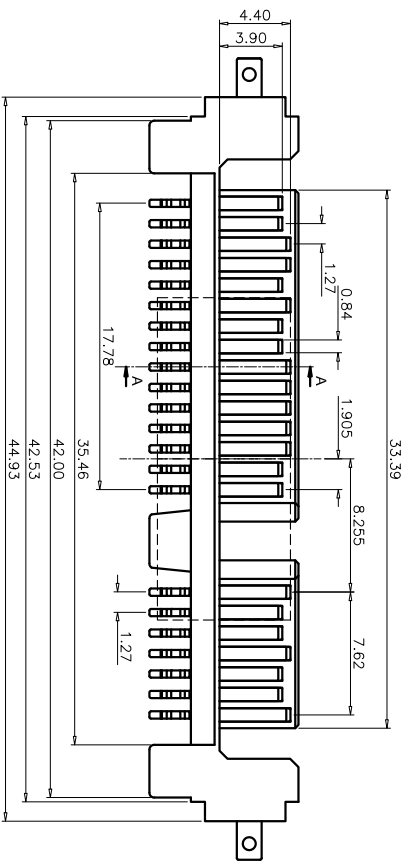

SECTION A-A

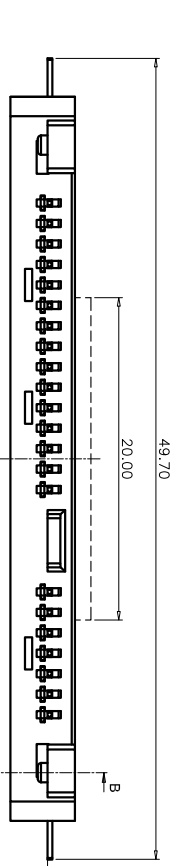

SECTION B-B

NO	DESCRIPTION	QTY	UNIT	DO NOT SCALE DRAWING
<p>DIMENSION ARE MILLIMETERS TOLERANCES ARE :                  .X : ± 0.30                  .XX : ± 0.25                  X : ± 3°</p>				
APPROVALS		DATE		<p>TITLE: SATA 22P 公頭沉板式</p> <p>EVERTRON</p>
DRAWN	GARY	12/03/08		
CHECKED				
APPROVALS				<p>SIZE SCALE : DRAWING NO. REV.</p> <p>mm 1 : 1 ET-SATA-22L-XXX AO</p>
ID NO.	XXXXXXXXXX	SHEET	1 OF 1	