


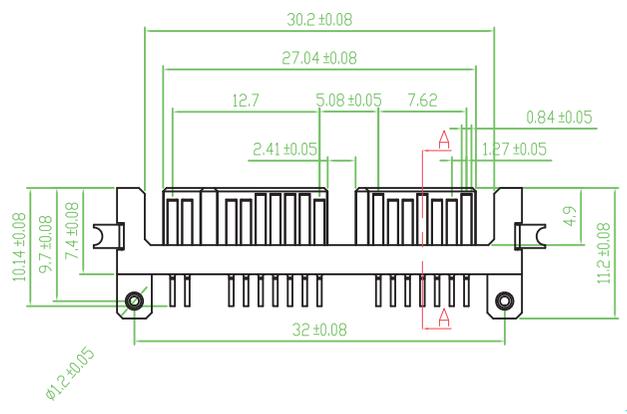
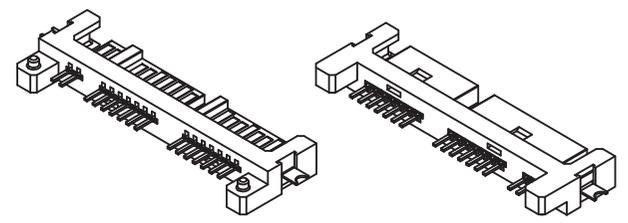



MARK	REV	DESCRIPTION	SIGN	DATE
------	-----	-------------	------	------

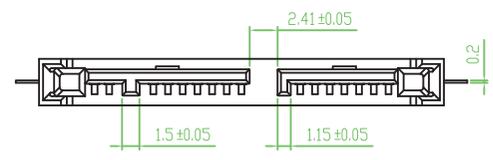

SECTION A-A (1/1)

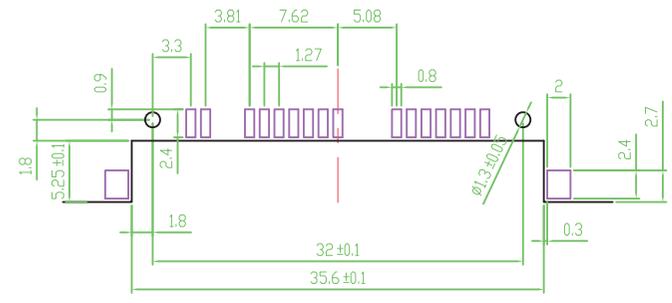

PCB LAYOUT

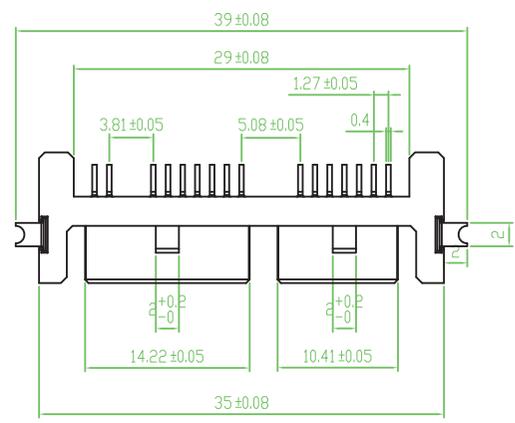

NOTE:
 HOUSING:LCP UL-94V0 BLACK
 CONTACTS:COPPER ALLOY
 FINISH:15u' ' AU PLATED OVER NICKEL ON CONTACT AREA
 100u' ' MATTE TIN PLATED ON SOLDER TAIL
 ELECTRICAL:
 CURRENT RATING:1.5A PER CONTACT
 CONTACT RESISTANCE:30m OHM MAX
 DIELECTRIC WITHSTANDING VOLTAGE:500VDC
 INSULATION RESISTANCE:1000M OHM MIN.

TOL#	M1	M2	S1	S2	P1	P2	C	USR	MODEL	DESCRIPTION				
RANGE	.05	.1	.15	.2	.25	.3	.4	.5		MICRO SATA CONNECTOR (7+9PIN) 破板型				
0~6	.05	.1	.15	.2	.25	.3	.4	.5	DATE	2008/02/19	DWG NO.	ET101-010180	REV	0
6~30	.1	.2	.25	.3	.4	.5	.6	.7	DRN	max	P/N NO.	ET101010180	SCALE	1/1
30~80	.15	.25	.3	.4	.5	.6	.7	.8	CKD		EVERTRON		DIM	MM
80~180	.15	.3	.45	.6	.75	.9	1.1	1.3	APPD				SIZE	A4
180~315	.2	.4	.6	.9	1.2	1.5	1.8	2.1						
315~800	.3	.6	.9	1.2	1.5	1.8	2.1	2.4						
ANG. TOL#	0°~30°	0.2°	30°~60°	0.5°	60°~90°	1°								