


ALL MATERIALS CONFORM TO THE ROHS COMPLIANCE.

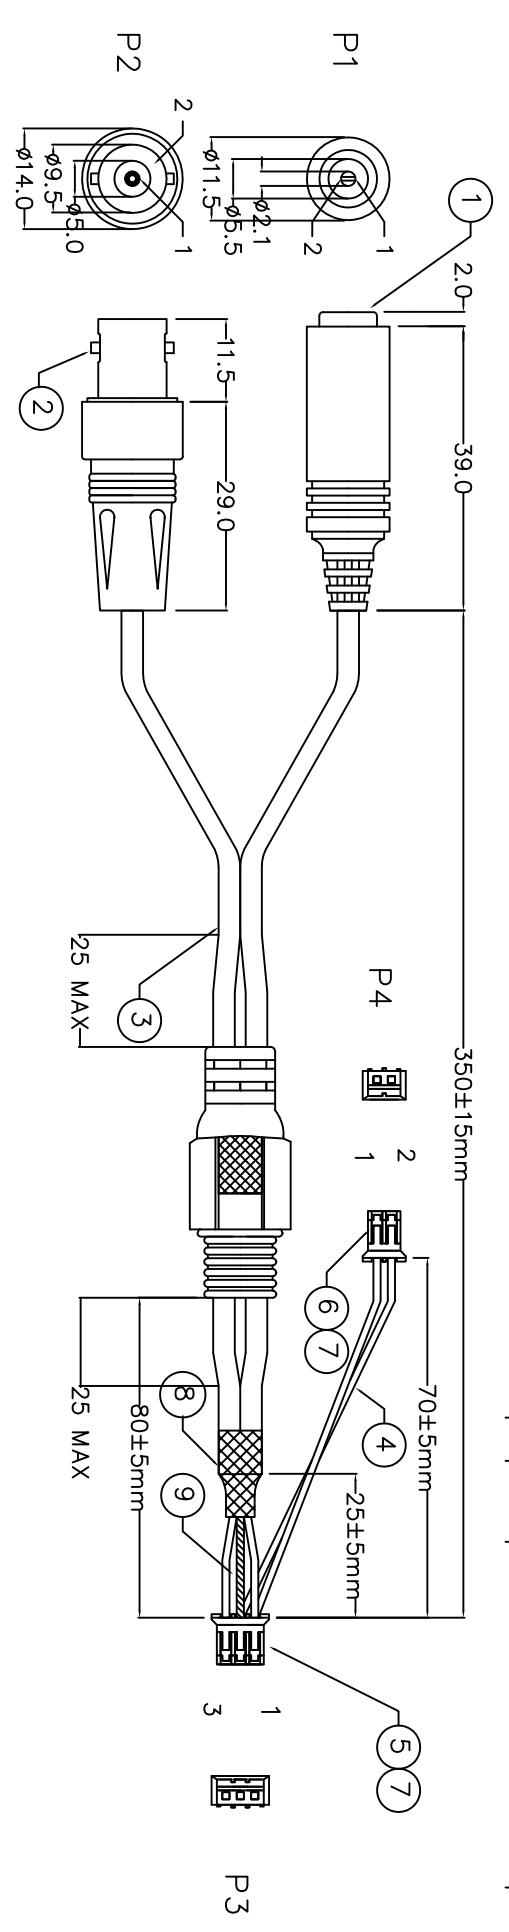

CABLE:
 CONDUCTOR: (26AWG*(C+SPIRAL SHIELD))*2F
 JACKET: PVC , OD: ø2.8*5.6mm
 COLOR: 灰色 NA GR 589/70P (灰色)

PIN ASSIGNMENT

COLOR	P1	P2	P3	P4	NOTE	DESCRIPTION
RED	1 (26AWG)		1	1	1	ø5.5*ø2.1 DC JACK (NICKEL PLATED) 剖薄式
BLACK	2 (SHIELD)		2	2	2	BNC JACK (NICKEL PLATED) CONNECTOR
BLACK		2 (SHIELD)	2		3	(26AWG*(C+S))*2F CABLE
WHITE		1 (26AWG)	3		4	UL 1061 26AWG * 2PCS CABLE
					5	P/N: CKM2001H-3P , 2.0mm*3P HOUSING
					6	P/N: CKM2001H-2P , 2.0mm*2P HOUSING
					7	P/N: CKM2001-T , 2.0mm TERMINAL * 5PCS
					8	ø5.0*20.0mm SHRINK TUBE
					9	ø1.5*25.0mm SHRINK TUBE

5	DRAWN	<i>Jack 7/27</i>	ETT P/N	ET - CA0210 - 0004	TITLE	BNC(F)+DC/3P+2P HSG		ETT EVERTRON TECHNOLOGY	
	CHECK	<i>Paul 7/27</i>	CUSTOMER P/N		UNIT	m	m	SCALE	NON
	APPROVED		DATE	2010 . 07 . 27	UNIT	m	m	SHEET	1 OF 1

REV.	R.S. No.	DESCRIPTION	DATE