


ALL MATERIALS CONFORM TO THE ROHS COMPLIANCE:

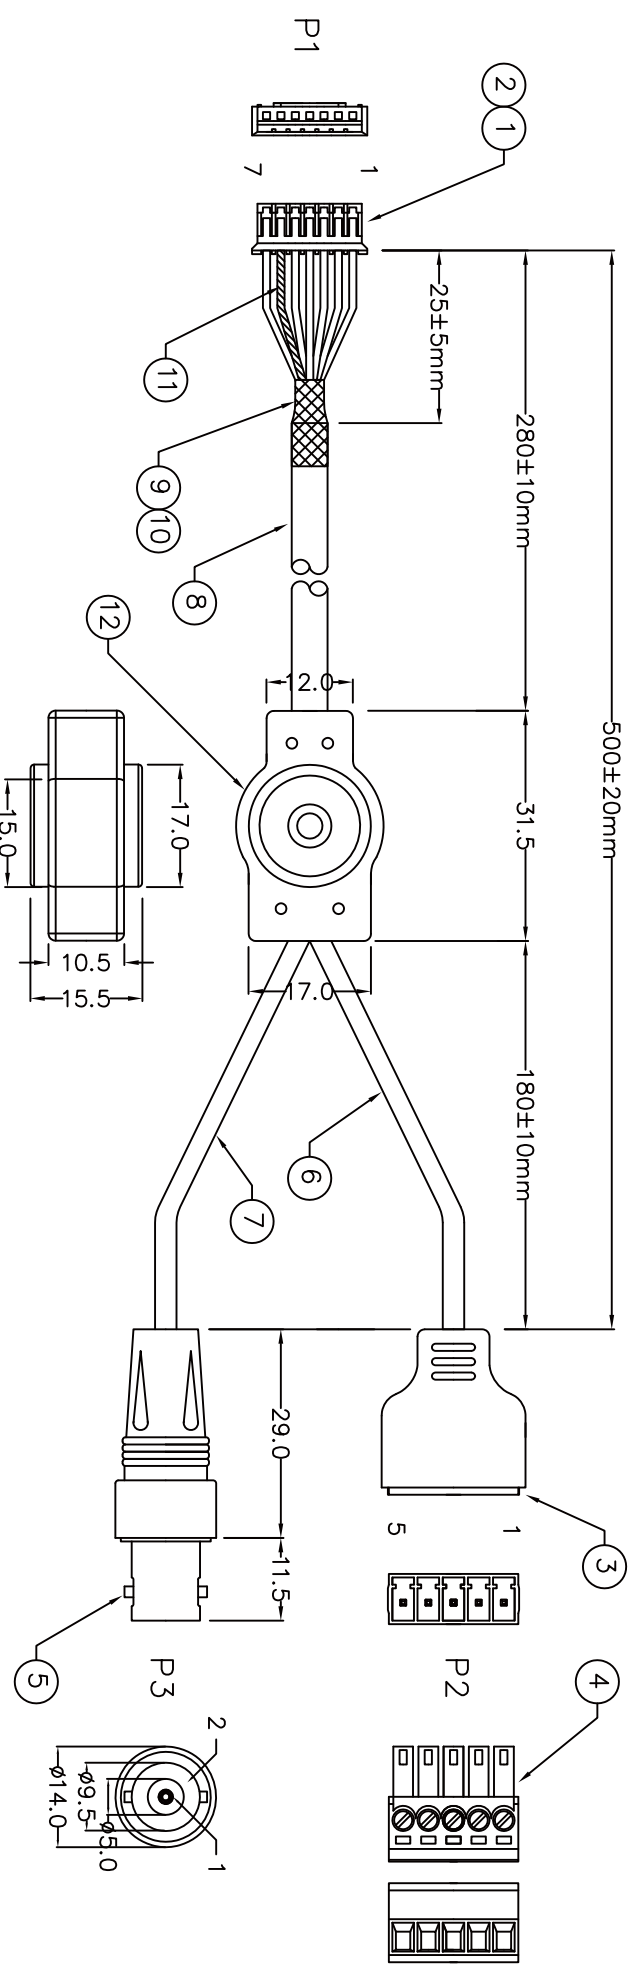

WIRING DIAGRAM

COLOR	P1	P2	P3	NOTE	DESCRIPTION
BLACK	1 (26AWG)	5 (DRAIN)		1	P/N: CKM2001H-7P , 2.0mm*7P HOUSING
BROWN	2 (26AWG)	4		2	P/N: CKM2001-T , 2.0mm TERMINAL * 7PCS
RED	3 (26AWG)	3		3	Pitch 3.50mm (0Q051100)
ORANGE	4 (26AWG)	2		4	另附: Pitch 3.50mm (TU051100)
YELLOW	5 (26AWG)	1		5	BNC JACK (NICKEL PLATED) CONNECTOR
BLACK	6 (SHIELD)	2		6	26AWG*4C+A+D CABLE
BLACK	7 (26AWG)	1		7	26AWG*1C+S CABLE
				8	(26AWG*1C+S)+26AWG*5C CABLE
				9	φ7.0*15.0mm SHRINK TUBE
				10	φ3.0*8.0mm SHRINK TUBE
				11	φ1.5*25.0mm SHRINK TUBE
				12	S/R

CABLE 1:
 CONDUCTOR: 26AWG*4C+AL/MYLAR+DRAIN WIRE
 JACKET: PVC , OD: φ4.0±0.1mm
 COLOR: BLACK

CABLE 2:
 CONDUCTOR: 26AWG*1C+SPIRAL SHIELD
 JACKET: PVC , OD: φ2.8±0.1mm
 COLOR: BLACK

CABLE 3:
 CONDUCTOR: (26AWG*1C+SPIRAL SHIELD)+26AWG*5C
 INSULATION: 26AWG*1C+S-PVC , ID: φ2.4±0.1mm
 JACKET: PVC , OD: φ6.0±0.2mm
 COLOR: BLACK

5	DRAWN	<i>Jack 8/12</i>	ETT P/N	ET - CA0210 - 0018	TITLE	Pitch 3.50mm M-F/BNC JACK to CKM 2001H-7P , 500mm CABLE
	CHECK	<i>Paul 8/12</i>	CUSTOMER P/N		UNIT	m m
	APPROVED		DATE	2010 . 08 . 12		

ETT EVERTRON TECHNOLOGY

SCALE: NON

SHEET: 1 OF 1

REV.	R.S. No.	DESCRIPTION	DATE