


ALL MATERIALS CONFORM TO THE ROHS COMPLIANCE.

REV.	R.S. No.	DESCRIPTION	DATE
UR1		UNAPPROVED REVISIONS	09/21-2011
UR2		REVISED WIRING TABLE	09/23-2011
UR3		REVISED P1-P2 & P4-P5 LENGTH (240±10 -> 240±10)	11/24-2011

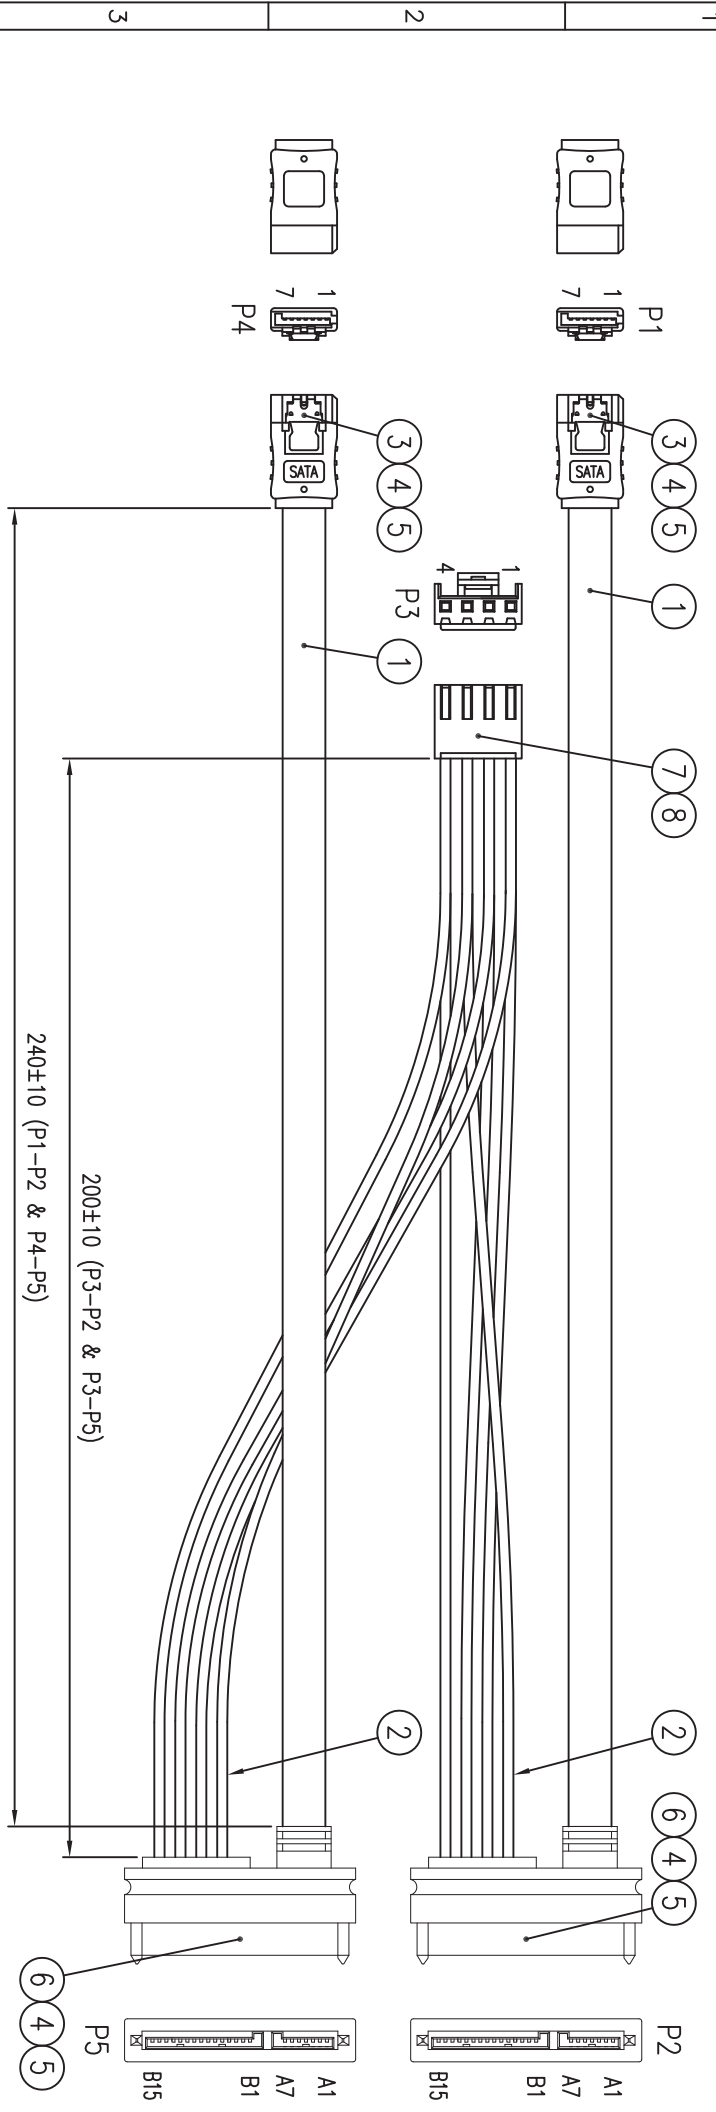

- Electronics Test :
- Contact Resistance : 2.0 Ω Max.
 - 100% open & short test (set at 50 KΩ)
 - At DC = 500V , Insulation Resistance : 100 MΩ Min.
 - Test Condition : Temperature : 25 ± 5°C , Humidity : 50% RH Max.

ITEM	PART NO./SUPPLIER	DESCRIPTION	Q'TY	DRAWN	DATE	SOCKET CONTACT	4 PGS
5		OUTER MOLD, PVC, 45P, BLACK	A/R	<i>Kern Lin</i>	11/24-2011		
4		INNER MOLD, LD-PE, NATURAL	A/R	CHECKED			
3	SATA-FL-7S (H11)/NS-Tech	SATA CONNECTOR, 7-POS., RECEPTACLE, W/LATCH, BLACK	2 PCS	<i>Kern Lin</i>	11/24-2011	HOUSING, 4-POS., 3.96mm PITCH, WHITE	1 PC
2	NS-TC-000113-W/NS-Tech	WIRE, 20 AWG, UL 1007	A/R	CUSTOMER APPROVED		SATA CONNECTOR, 7-POS. + 15-POS., RECEPTACLE, BLACK	2 PCS
1	NS-TC-000263-W/NS-Tech	SATA CABLE, (26 AWG x 2C + A) x 2 + 4E, UL 2725, RED	A/R				

EVERTRON TECHNOLOGY

SATA POWER CABLE ASSEMBLY				CUSTOMER P/N	PAGE	1 OF 2
UNIT	MM	SCALE	FREE	PART NUMBER	REVISION	UR3

ITEM	PART NO./SUPPLIER	DESCRIPTION	Q'TY
5		OUTER MOLD, PVC, 45P, BLACK	A/R
4		INNER MOLD, LD-PE, NATURAL	A/R
3	SATA-FL-7S (H11)/NS-Tech	SATA CONNECTOR, 7-POS., RECEPTACLE, W/LATCH, BLACK	2 PCS
2	NS-TC-000113-W/NS-Tech	WIRE, 20 AWG, UL 1007	A/R
1	NS-TC-000263-W/NS-Tech	SATA CABLE, (26 AWG x 2C + A) x 2 + 4E, UL 2725, RED	A/R